



# Nexus 5 Midframe Replacement

Replace the midframe in your Nexus 5.

Written By: Gaetan



## INTRODUCTION

Use this guide to replace the backplate that secures the motherboard of your Nexus 5.



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)



### PARTS:

- [Nexus 5 Midframe](#) (1)
- [Nexus 5 Lens Cover](#) (1)
- [Nexus 5 Rear Camera Bezel Lens Cover](#) (1)
- [Nexus 5 Vibration Motor](#) (1)

## Step 1 — Back Cover




- Use a [plastic opening tool](#) to free the clips on the top and each side of the back cover.
- i** The bottom is secured with some adhesive foam. You should be able to finally free the back cover using an [opening pick](#).
- i** It's best to avoid prying around the SIM card slot, as the plastic here is very thin and likely to break from prying.

## Step 2 — Midframe



- Remove the six 4.0 mm Phillips #00 screws that secure the midframe to the phone.
- To replace the LCD screen and digitizer, remove the additional four 4.0mm daughterboard cover screws with the same screwdriver.

## Step 3

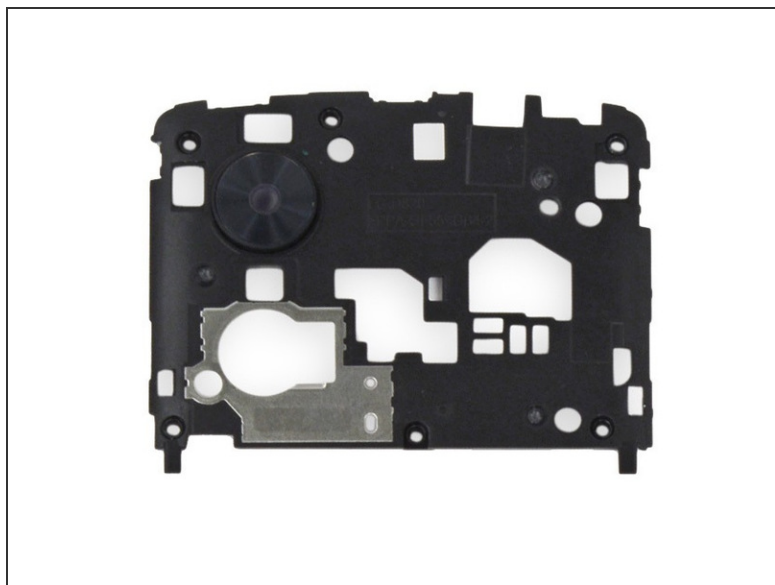

- Remove the midframe from the phone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 06:02:05 AM.